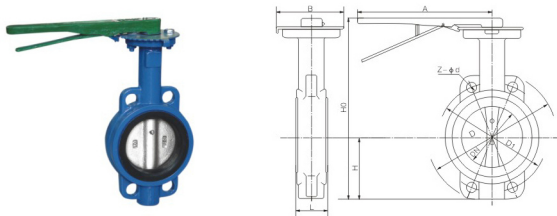


HAND OPERATED WAFER TYPE RUBBER LINED BUTTERFLY VALVE
 GB, ANSI, JIS, DIN, BS

手动、对夹式衬胶蝶阀


 $D71 \frac{XA}{A} -10$ 连接尺寸 Series connection dimensions

公称直径 (DN) Nominal diameter	L	D1	D	Z-φd	H	HO	A	B
25	43	85		4-14				
32	43	100		4-18				
40	43	110		4-18		220		
50	43	125		4-18	63	235	270	65
65	46	145	165	4-18	70	250	270	65
80	46	160	185	8-18	83	275	270	65
100	52	180	200	8-18	105	316	270	65
125	56	210	220	8-18	115	340	310	65
150	56	240	285	8-22	137	376	310	65
200	60	295	340	8-22	164	472	365	90

 $D271 \frac{XA}{A} -10$ C、P、R、Z连接尺寸 Series connection dimensions

公称直径 Nominal diameter	L	D1	D	Z-φd	H	HO	A	B	DO
50	43	125	165	4-18	63	306	193	125	150
65	46	145	185	4-18	70	321	193	125	150
80	46	160	200	8-18	83	346	193	125	150
100	52	180	220	8-18	105	367	193	125	150
125	56	210	250	8-18	115	411	193	125	150
150	56	240	285	8-22	137	447	193	125	150
200	60	295	340	8-22	164	572	283	165	220
250	68	350	395	12-22	206	646	283	165	220
300	78	400	445	12-22	230	738	334	175	280
350	78	460	505	16-22	248	761	334	175	280
400	102	515	565	16-26	289	877	425	210	320
450	114	565	615	20-26	320	938	425	210	320
500	127	620	670	20-26	343	993	425	210	320
600	154	725	780	20-30	413	1131	425	210	320
700	165	840	895	24-30	478	1476	620	320	400
800	190	950	1015	34-33	525	1533	620	320	400
900	203	1050	1115	28-33	585	1655	620	320	400
1000	216	1160	1230	28-36	640	1765	620	400	400
1200	254	1380	1455	32-39	755	1995	620	400	400

注: 1. 以上蝶阀的密封试验压力 DN50-DN800 为 1.0Mpa; DN900-DN1000 为 0.6Mpa。

2. 以上蝶阀的连接尺寸均按 1.0Mpa 标准制造, 如用户需要衬胶板衬橡胶等特殊需要, 订货时应注明。

Note: 1. The seal test pressure of above butterfly valve is 1.0Mpa when normal diameter is DN50-DN800 and is 0.6Mpa when normal diameter is DN900-DN1000

2. connection dimension of above butterfly valve is conform to 1.0Mpa standard; please mark if user need disc rubber lined or other special requirements